

# House Service Cut Out

## Triple Pole Combined Neutral Earth (CNE) Closed Coupled: 60 / 80A rated or 100A rated

### Overview and Presentation

Devices accepting BS 1361 cylindrical cartridge fuses having combined Neutral and Earth blocks and supplied with cable protection covers.



### Features

- Incoming and outgoing Phase and Neutral terminations accept up to 35mm<sup>2</sup> conductors in either copper or aluminium, stranded or solid
- Silver plated Phase terminal contact block
- Serrated bores on Phase/Neutral terminal contact blocks with two M8 hexagon drive screws per conductor
- Earth / Timer connections on N/E block accept up to 25mm<sup>2</sup> conductors
- Safety interlocked mouldings. Neither the N/E terminal chamber cover nor the cable cover itself can be removed until the right hand fuse carrier has been withdrawn
- Sealing wire facility
- Blanking plugs for unused cable entries provided
- Choice of bottom or side cable entries in cable cover

**Note:** The equipment described on this data sheet must be installed by suitably qualified personnel according to applicable Local / National Wiring regulations currently in force.

## Low Voltage - Cut Outs

### Construction

- Body, base and cover..... Glass reinforced polyester DMC in RAL 7035 colour
- Terminal blocks..... Brass (silver plated on Phase)
- Cable shrouds..... Synthetic nitrile rubber

### Fuse characteristics

- 60/80A ..... 57 x 22mm Type IIa BS 1361
- 100A ..... 57 x 30mm Type IIb BS 1361

### Performance

- Rated voltage..... 240/415V a.c.
- Max rated current..... 100A
- Supply frequency..... 50-60Hz
- Flammability rating..... UL VO, self-extinguishing 30 seconds at 960 degrees C
- Recommended terminal torque..... 3.25Nm
- Fuse short circuit rating..... 33kA at 0.3pf


### Conformity to Standards

- Conforms to BS 7657:2010
- Accepts fuse links in accordance with BS 1361:1991

### Weights and dimensions

- Height ..... 250mm
- Width ..... 181mm
- Depth ..... 96mm
- Weight (excluding fuses)..... 1.92kgs

General arrangement and dimensions (mm)

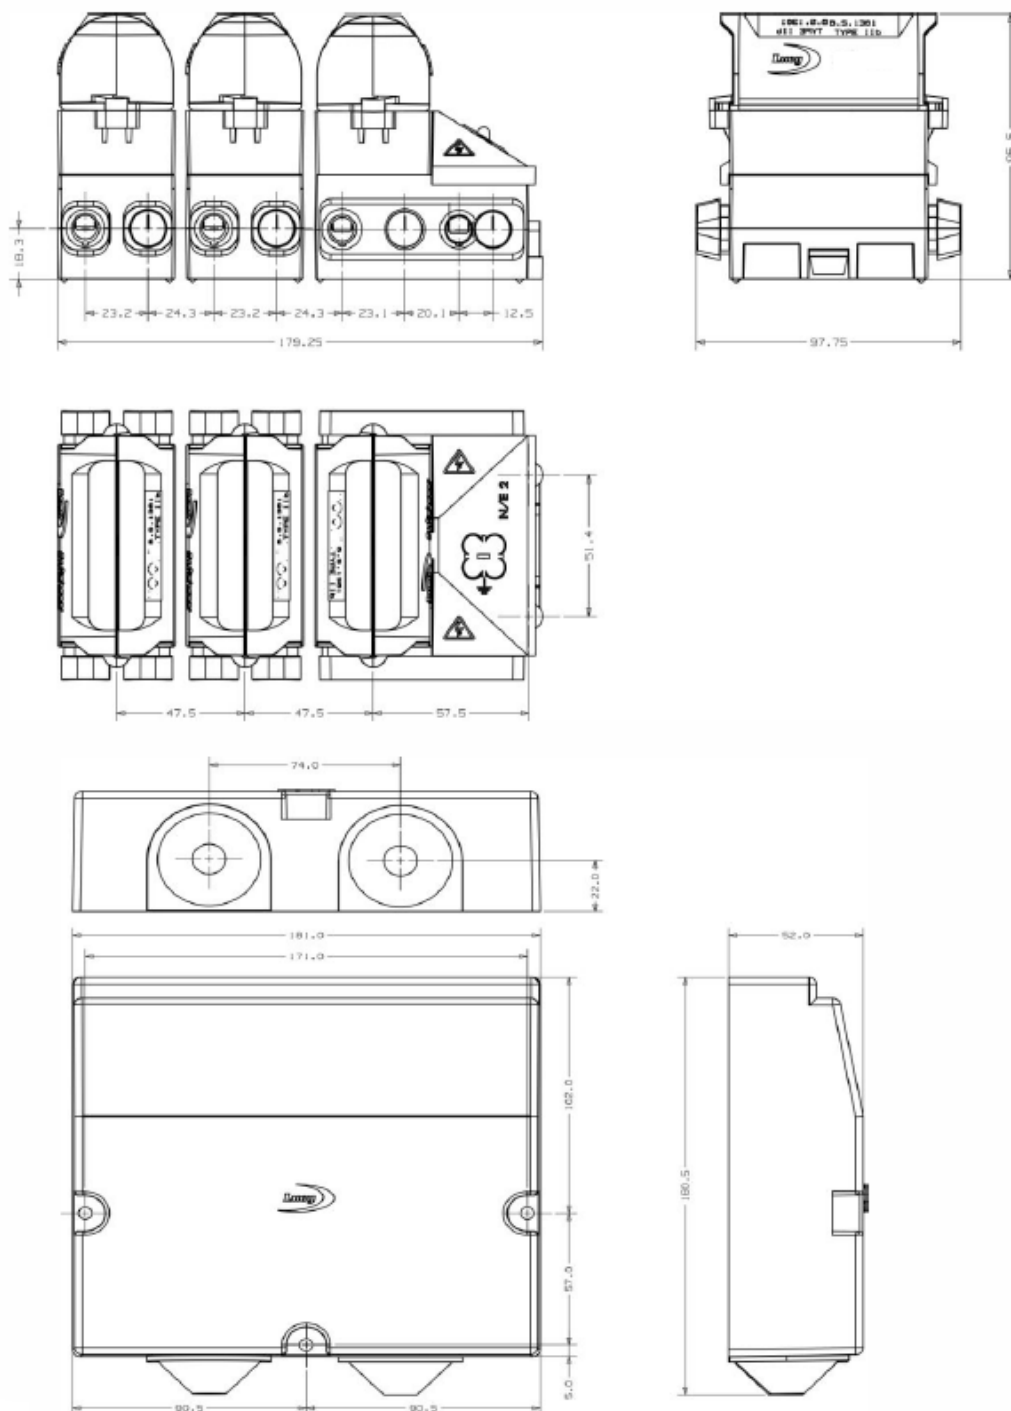

**Disclaimer:** Lucy Electric has a policy of continuous research and development thus accordingly reserves the right to change the design and specifications of its products without prior notice or liability.



[www.lucyelectric.com](http://www.lucyelectric.com)